



# Inline Fan Specifications

Spruce Inline Fans are suitable for a wide range of residential and commercial ventilation applications. The fans are remotely mounted in an attic or crawlspace, thereby virtually eliminating noise from the living area(s).

## RL Series Metal Housings


Suitable for:



- Bathroom Ventilation
- Kitchen Ventilation
- Duct Boosting
- Living Area
- Garage Ventilation



Model	P/N	Duct	Watts	Typical CFM vs. Static Pressure							Energy Star
				0"	0.2"	0.5"	0.75"	1.0"	1.25"	1.5"	
RL200	28224	4"	39-59	160	147	127	108	90	60	42	--
RL300	28225	6"	50-73	261	237	175	125	90	55	37	✓
RL350	28226	6"	64-86	290	266	220	175	141	100	55	✓
RL450	28227	8"	95-150	476	429	350	280	235	192	145	✓
RL500	28228	10"	98-152	531	479	395	310	240	197	160	✓
RL600	28126	12"	150-215	670	610	513	420	329	263	206	✓

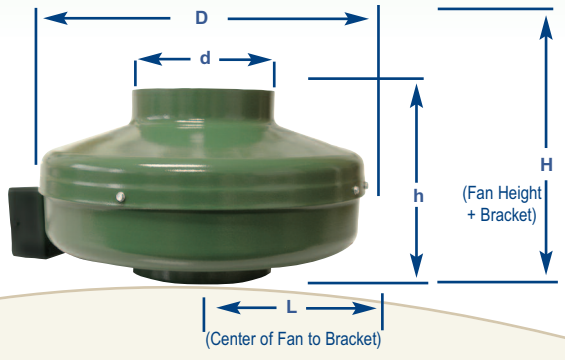


Model	H	h	L	D	d
RL200	8.75	7.38	4.88	9.50	3.88
RL300	9.38	7.50	6.88	13.50	5.88
RL350	9.38	7.50	6.88	13.50	5.88
RL450	10.50	9.13	6.88	13.50	7.88
RL500	10.50	9.13	6.88	13.50	9.88
RL600	N/A	10.00	8.00	15.88	12.38



# Inline Fan Specifications



## RV Series

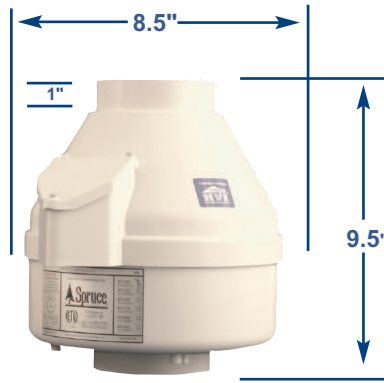


Suitable for:

- Bathroom Ventilation
- Kitchen Ventilation
- Duct Boosting
- Living Area
- Garage Ventilation



Model	P/N	Duct	Watts	Typical CFM vs. Static Pressure						
				0"	0.2"	0.5"	0.75"	1.0"	1.25"	1.5"
RV125	28042	4"	48-68	116	110	98	88	72	57	44
RV150	28041	4"	48-65	150	140	119	100	76	53	26
RV200	28049	6"	49-65	185	170	144	123	87	48	1

## RB Series

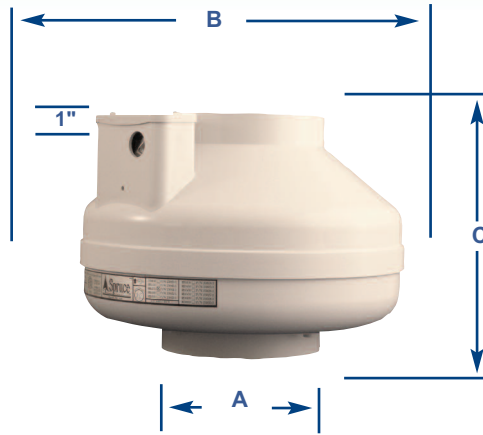

Suitable for:

- Bathroom Ventilation
- Kitchen Ventilation
- Duct Boosting
- Living Area
- Garage Ventilation



	A	B	C
RB110	4"	9.7"	8.5"
RB275	6"	11.8"	8.6"
RB300	6"	13.4"	9"
RB350	6"	13.4"	9"
RB400	8"	13.4"	10.5"
RB500	10"	13.4"	10.5"

Model	P/N	Duct	Watts	Typical CFM vs. Static Pressure							Energy Star
				0"	0.2"	0.5"	0.75"	1.0"	1.25"	1.5"	
RB110	28128	4"	14-20	135	100	68	10	--	--	--	✓
RB275	28115	6"	52-72	275	230	176	140	103	70	20	✓
RB300	28088	6"	65-90	320	270	211	172	135	90	30	✓
RB350	28261	6"	86-140	327	302	260	230	207	176	139	--
RB400	28206	8"	103-156	510	470	393	315	268	218	165	✓
RB500	28207	10"	103-156	500	460	384	319	259	197	136	✓